

RX/TXD – RECEIVER-TRANSMITTER UNIT VERSATILE ENCODER INTERFACE




FEATURES

- DIN rail mount
- Level changes from Vcc to 5V
- Signal Conditioner or Repeater for distance transmission
- 2 or 3-way splitter/level changer
- Encoder tester/verifier

This lightweight DIN rail mountable unit, Line Driver and Line Receiver is composed of a PC/ABS self-extinguishing material blend. Configurable as a level changer, line repeater, splitter or encoder tester, the RX/TXD will accept TTL, RS422, RS485, PP, NPN, NPN OC, or PNP encoder inputs at 5V, or HTL, PP, NPN, NPN OC & PNP at 5-24V. It will provide up to three outputs in any combination of TTL, RS422, RS485, PP, at 5V, or HTL, PP at 5-24V. A series of LEDs on the front panel indicates power and signal presence. Connections are made via the easily accessible screw terminals as standard. This device may be used as both a Line Driver and Line Receiver.

RX/TXD ORDERING GUIDE

Blue type indicates price adder options. Not all configurations may be available. Contact Customer Service for details.

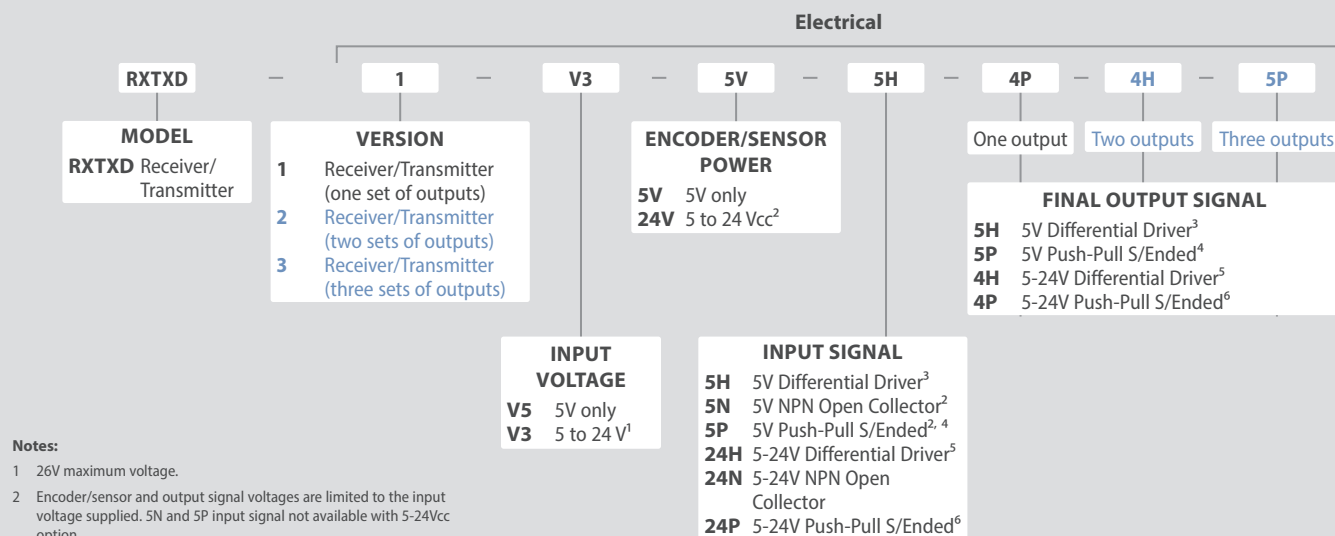

Notes:

- 26V maximum voltage.
- Encoder/sensor and output signal voltages are limited to the input voltage supplied. 5N and 5P input signal not available with 5-24Vcc option.
- TTL, RS422, and RS485 compatible.
- TTL, NPN (sink), PNP (source), PP.
- HTL compatible.
- NPN (sink), PNP (source), PP.

RX/TXD – RECEIVER-TRANSMITTER UNIT VERSATILE ENCODER INTERFACE

RX/TXD SPECIFICATIONS

Electrical

Input Voltage5V to 26V max
 Current Consumption.....250 mA typical
 Repeater Output Voltage.....5V or Vcc
 Frequency Response.....Up to 800 KHz
 Output Current.....30 mA/channel max



Mechanical

Weight.....250 g
 EnclosurePC/ABS, IP20
 TerminalScrew type 30/12 AWG

Environmental

Operating Temp0° C to 85° C

RX/TXD RECEIVER-TRANSMITTER

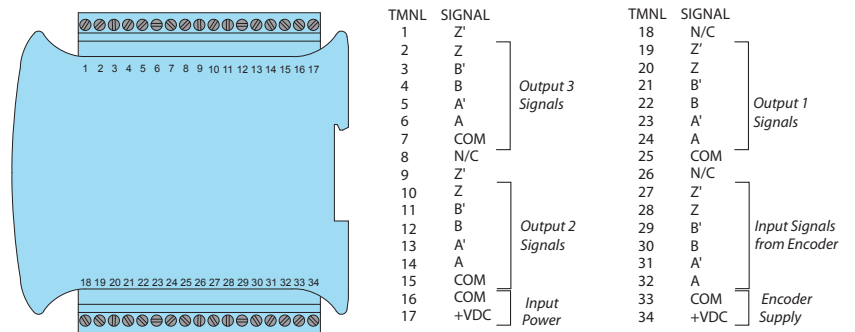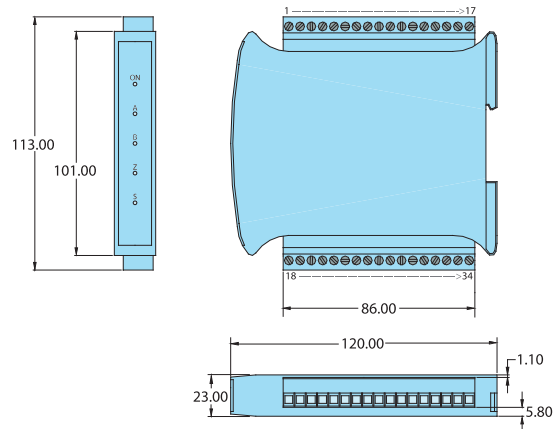

All inputs and outputs may not be present, depending on the RX/TXD version.

