


# MEC-HLC

## Standard Features:

- Controlled, precise and safe actuation of the equipment
- Enhanced operator safety
- Improved efficiency of operation
- Reduce operational costs with positive ROI
- High performance wireless control
- No limits of applications
- Easy installation
- No maintenance required
- Rugged durability
- High reliability and long life

## Typical Applications:

- Retro fitting
- Unequipped RRC machines
- Hydraulic cranes

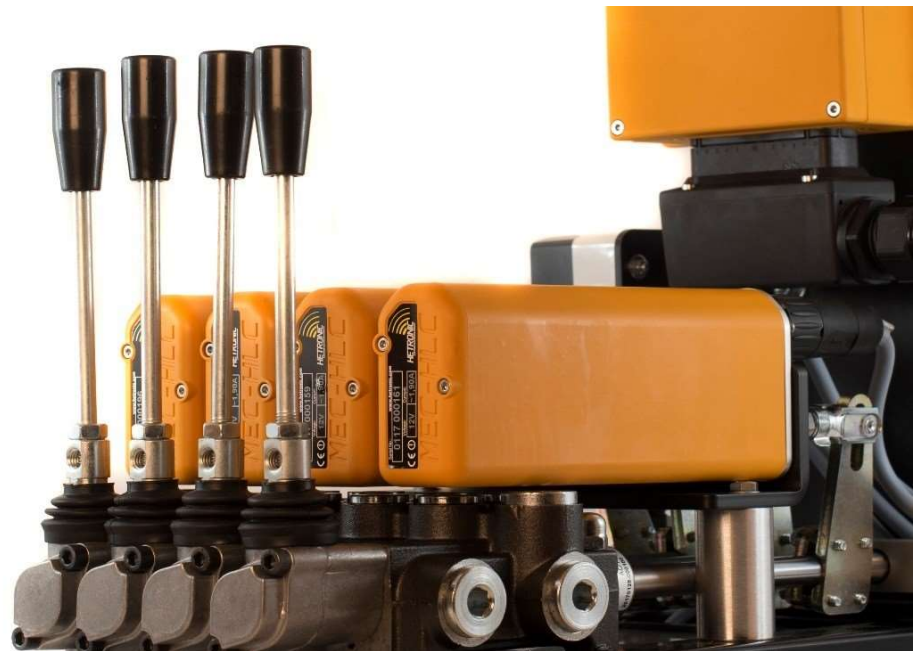

<b>MEC-HLC Specifications:</b>			
<b>Nominal Value of Transmissible Force:</b>	200N (45 lbs)	<b>Tolerable Mounting Position:</b>	0° ÷ 360°
<b>Absolute Value of Transmissible Force:</b>	350N (77 lbs)	<b>External Dimensions:</b>	H: 182 mm (7.2") W: 82 mm (3.2") D: 44 mm (1.7")
<b>Maximum Stroke:</b>	25mm + 25mm (1" + 1")	<b>Locking to Stem:</b>	M8
<b>Maximum Tolerable Axial Load:</b>	400N (90 lbs)	<b>Locking Holes:</b>	N°2 M6x10
<b>Maximum Tolerable Radial Load:</b>	15N (3.5 lbs)	<b>Weight:</b>	1580g (3,5 lbs)
<b>Average Movement Accuracy:</b>	0,1mm (0,0039")	<b>Power supply voltage:</b>	12V or 24V
<b>Maximum Speed Movement:</b>	6 mm/s	<b>Current required under maximum stress:</b>	~ 1,9 A
<b>Compatible Drivers:</b>		<b>Protection Class:</b>	IP 65
<b>RX DC-Mobile Receiver:</b>	74021250	<b>Operating Temperature:</b>	-20°C to +70° C (-4° F to +158° F)
<b>RX 14-HL+ADM-6 Receiver:</b>	72251150		
<b>RX BMS-HL Receiver:</b>	72041400		

