gSENS LWG 120 Compact length / angle sensor for mobile machinery

Applications

- Mobile Cranes
- Telehandlers
- Boom Trucks
- Knuckle Boom Cranes

Special Features

- Lengths up to 15m
- Compensation for cross sensitivity and temperature coefficient
- Configurable vibration suppression parameters for angle
- MEMS technology for angle measurement and Hall Effect technology for length measurement
- Supply line is protected against reversed polarity and load dump



gSENS LWG 120

Description

gSENS LWG 120 length / angle sensors reliably measure telescopic lengths of up to 15m and extended boom angles between -180° and +180°. Their compact design guarantees easy installation on a variety of machine types. gSENS LWG 120 sensors use CAN communication as output signals.

This length / angle sensor ensures highest operational reliability. With its sturdy housing, shock / vibration resistance acc. to IEC 60068 and electromagnetic compatibility acc. to IEC 61000, the robust gSENS LWG 120 withstands the harshest environmental conditions.

01/2025 Page 1 of 4

www.wika-mc.com

WIKA Mobile Control GmbH & Co. KG Hertzstraße 32-34 · 76275 · Ettlingen · Germany Tel. +49 7243 709-0 · sales.wmc@wika.com



Technical Specifications

Product Series	LWG 120 - 5m	LWG 120 - 10m	LWG 120 - 15m		
Operating voltage	836V DC				
Output signal	CANopen				
Hall-off speed	1m/s				
Length measurement range	05m	010m	015m		
Length accuracy (at 25°C)	±0.5%FS				
Length repeatability	±0.1%FS				
Inclinometer measurement range	-180°+180°				
Inclinometer accuracy (at 25°C)	±0.3°				
Inclinometer temperature drift	±0.01 °/°C				
Operation temperature	-40°C+70°C				
Electrical connection	Male flange connector M12, 5-Pin				
Housing	Aluminum + PC				
Protection rating	IP66/67				
Shock / vibration resistance	Acc. IEC 60068-2-27 / IEC 60068-2-6				
Electromagnetic compatibility	Acc. to IEC 61000-6-2/ IEC 61000-6-4				
MTTFd gSENS LG 120	225.37 years				
MTTFd gSENS LWG 120	256.95 years				


01/2025 Page 2 of 4


www.wika-mc.com


WIKA Mobile Control GmbH & Co. KG Hertzstraße 32-34 · 76275 · Ettlingen · Germany Tel. +49 7243 709-0 · sales.wmc@wika.com



Dimensions

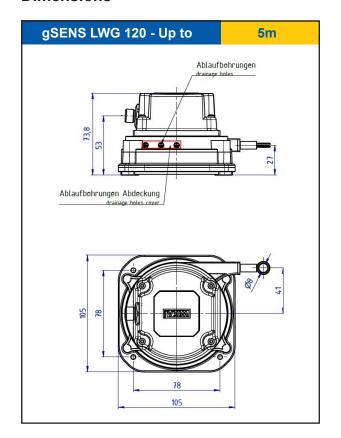

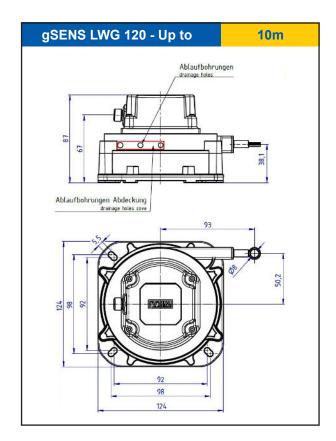

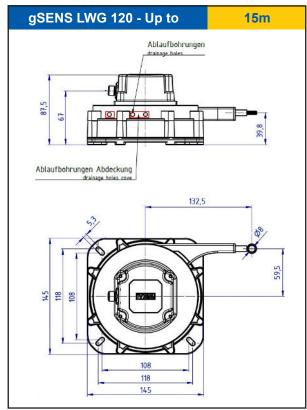

01/2025 Page 3 of 4

www.wika-mc.com

WIKA Mobile Control GmbH & Co. KG Hertzstraße 32-34 · 76275 · Ettlingen · Germany Tel. +49 7243 709-0 · sales.wmc@wika.com



Pin Assignment

Male Flange Connector M12 5-Pin	Pin no.	Assignment	
((310) (310) (310)	1	Shield	
	2	Power	
	3	GND	
	4	CAN_H	
	5	CAN_L	

Product Code Description

LWG type	Part number	Description	Length	Angle	Output
LG 120/3050	83902923	gSENS LG 120/3050-C1/01-005/005-GL -00	5m	no	CAN
LG 120/3100	83902927	gSENS LG 120/3100-C1/01-010/010-GL -00	10m	no	CAN
LG 120/3150	83902928	gSENS LG 120/3150-C1/01-015/015-GL -00	15m	no	CAN
LWG 120/3050	83902929	gSENS LWG 120/3050-C1/01-005/005-GL -00	5m	yes	CAN
LWG 120/3100	83902930	gSENS LWG 120/3100-C1/01-010/010-GL -00	10m	yes	CAN
LWG 120/3150	83902931	gSENS LWG 120/3150-C1/01-015/015-GL -00	15m	yes	CAN

01/2025 Page 4 of 4

www.wika-mc.com

WIKA Mobile Control GmbH & Co. KG Hertzstraße 32-34 · 76275 · Ettlingen · Germany Tel. +49 7243 709-0 · sales.wmc@wika.com

